




Equipment: ● Screw driver ● M2.5 Screw (2x)

REAR PANEL ASSEMBLY

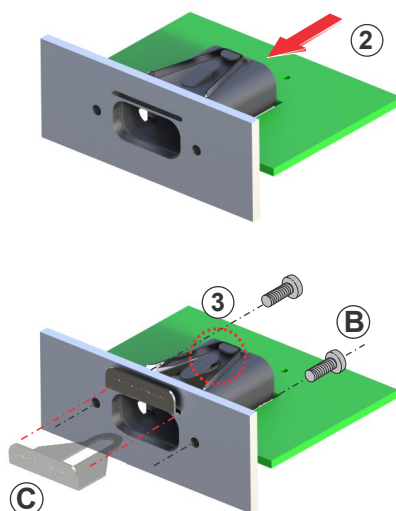

- A** Mount the NMC-C Chassis either in front of the panel (1) or behind it (2).

B Position the screw and fix it with the screw driver.





ATTENTION:
Tightening torque
 $M_A = 30 \text{ Ncm}$

C Place the «PUSH» in the guide until it stops (3).

ATTENTION:
Tightening torque
 $M_A = 30 \text{ Ncm}$

REAR PANEL ASSEMBLY

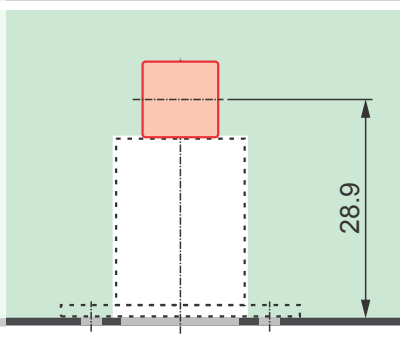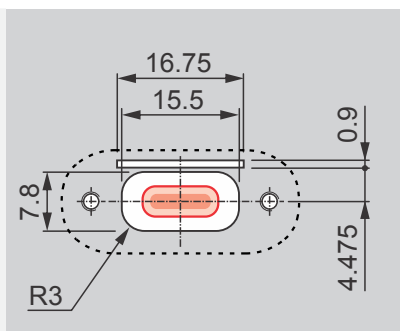

-  **RECEPTACLE**
(according USB Type C)
-  **PCB**
-  **mediaCON CHASSIS**
-  **PANEL**



**Find more about
details and
tolerances
of mediaCON on
www.neutrik.com.**

Neutrik AG	LI	T: +423 / 237 24 24	F: +423 / 232 53 93	Neutrik France	FR	T: +33 1 / 4131 6750	F: +33 1 / 4131 0511
Neutrik USA Inc.	USA	T: +1 704 / 972 3050	F: +1 704 / 438 9202	Neutrik Tokyo Ltd.	JP	T: +81 3 / 3663 4733	F: +81 3 / 3663 4796
Neutrik (UK) Ltd.	UK	T: +44 1983 / 811 441	F: +44 1983 / 811 439	Neutrik Hong Kong Ltd.	HK	T: +852 / 2687 6055	F: +852 / 2687 6052
Neutrik Vertriebs GmbH	DE/NL/AT/DK	T: +49 8131 / 280 890	F: +49 8131 / 280 830	Neutrik India Pvt. Ltd.	IND	T: +91 / 982 05 43 424	F: +91 / 22 26163 540

Draft. Nr.: BDA 539 | Update: 07.09.2018 | Data subject to change without prior notice. © 2018 NEUTRIK®. NEUTRIK® are registered trademark of NEUTRI AG. ALL RIGHTS RESERVED.

www.neutrik.com

NEUTRIK®